

The Hurikan 500 Transportable



The Hurikan 500 Transportable is supplied static and its design features, including a collapsible chimney, ensure that it can be easily mounted on a trailer or skid for transportation to other locations. This machine is a high-capacity, *high-burn rate incinerator ideal for managing the bio-secure disposal of large quantities of animal-by-product waste and animal carcasses, through to general waste. The top-loading design, with an easily manoeuvrable sliding lid, allows users to optimise the space available in the large main chamber. The Hurikan 500 Transportable has become regularly utilised by various industries across the agricultural sector, due to its ability to easily manage the disposal of a range of animal carcasses, from poultry operations, through to slaughterhouses and meat processing plants, dairy cattle and large pigs.

*Higher burn rates are dependent on efficient usage and waste type. This may be subject to your local regulations. Speak to a member of our team for more information. As with all models in the Hurikan Range, the Hurikan 500 Transportable is supplied with an integral secondary chamber, ensuring it fully conforms to EU By-Products Regulation (ABPR) (EC) No 142/2011, DEFRA Regulations and many other legislative bodies around the world.

Key Features:


- Low thermal mass monolithic lining
- The transportable is supplied as static and its design features of the fold down chimney and other fittings ensure it is easily mounted on a trailer (trailer not supplied)
- In the event of disease outbreak the incinerator can be operated and waste loaded within 2 hours of the incinerator arriving on site, providing swift containment.
- Transportable system is supplied with fuel tank, generator, safety platform ladder, storage facility and ash rake
- Top loading design with manual easily moveable slide Open/Close lid or optional automatic opening lid.
- Market leading unique hearth bar technology allows for fast and complete incineration
- Pulse fired burners both above and below the hearth bars maximises throughput. Four burners are located in the main chamber, with one above the hearth bars and three below. One additional burner is located in the after chamber.
- *High burn rate of up to 500kg/1103 lbs an hour enables fast disposal of waste
- Ash doors, as standard, allows fast and efficient ash removal whilst in operation removing downtime
- Temperature controlled burners for optimal efficiency
- PLC timer controls with automatic burner shut off function and rapid ignition burners for low running costs
- Fully programmable touch screen HMI control panel with automatic burner shut off function and rapid ignition burners for low running costs
- Can be loaded whilst in operation maximising the inherent thermal efficiency of our monolithic lining

Ideally Suited For:

- Disaster Response
- Disease Outbreak
- General Waste
- Animal Carcasses
- Animal-By-Product Waste

Optional Features:

- Mobile or Static Options Available
- Ash Rake
- Automated Lid
- Heat Exchanger

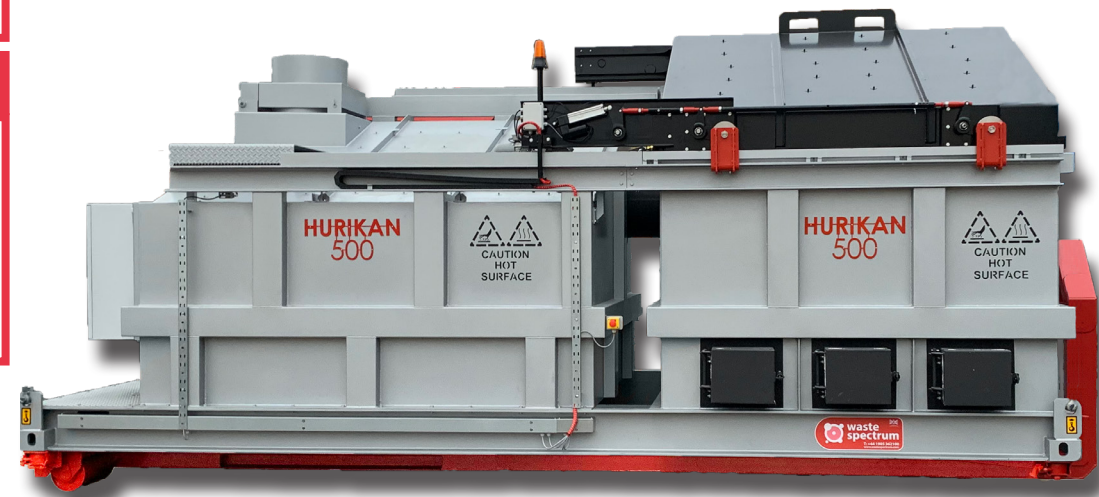

*Image depicts Hurikan 500 Transportable with optional skid mount and optional automated lid

The Hurikan 500 Transportable Specifications



Specifications	Unit - Metric		Unit - Imperial	
Burn Rate	Up to kg/hr	500	Up to lbs/hr	1103
Front / Top Load		Top		Top
Operational Dimensions (LxWxH)	m	6.1 x 2.8 x 4.1	feet/inch	19'10" x 9'3" x 13'3"
External Height - Transportable	mm *inc. Stack	4036	feet/inch *inc. Stack	13'3"
External Height - Transportable	mm *ex. Stack	2826	feet/inch *ex. Stack	9'3"
Weight	Tonne *estimated	12.8	lbs *estimated	28224
Concrete Pad Size (L x W)	m	NA	feet/inch	NA
Fuel Consumption Diesel	LPH *est during main burn	22 - 31	GPH *est during main burn	5.8 - 8.2
Fuel Consumption LPG	LPH *est during main burn	32 - 46	GPH * est during main burn	7.7 - 12.2
Fuel Consumption Nat Gas	m ³ /h *est during main burn	22 - 31	ft ³ /h *est during main burn	774 - 1094
Hearth Bars		30		30
Load Door Opening (Width x Height/Depth)	mm *area	1955 x 1880	ft/inch	6'5" x 6'2"
Chamber Size (LxWxH)	m	2.0 x 1.9 x (1.5-2.2)	ft/inch	6'5" x 6'2" x (4'11" - 7'3")
Chamber Actual Volume	m ³	5.30	ft ³	187
Chamber Load Volume	m ³	3.13	ft ³	110
Chamber Load Capacity	kg	1720	lbs	3793
Std Stack Diameter	inch/mm *2D Size	540mm	inch *2D Size	540mm
No. Main Burners		4		4
No. Secondary Burners		1		1
Burner Output	kW *heat	517	Btu *heat	1,764,077
Electric Consumption	kW *electricity	1	kW *electricity	1

The Waste Spectrum Way:

Here at Waste Spectrum, we do things a little differently.

- Each machine is hand crafted by our team of industry experts at our workshop in the Heart of England.
- Integral to our machines quality is the monolithic casting system, a technology that is unique to the Waste Spectrum brand. The monolithic casting system ensures maximum strength and reliability as the materials can expand and contract at the same rate, unlike brick lined machines. The insulation board reduces heat loss and the stainless anchor system maintains the integrity of the lining.
- The Waste Spectrum monolithic casting system ensures the longevity and reliability of our machines, as they can achieve high temperatures without posing risk to the machines structural integrity.
- Behind the Waste Spectrum brand is a team of experts who are always on hand to discuss any queries or questions that you may have about incineration.



Image illustrates suggested loading method



Optional Static Model