

The Volkan 400 1100.2



Highly versatile and suitable for applications across various industries such as the agricultural sector and the **medical sector, the Volkan 400 1100.2 has fast become a first choice for those requiring a more compact model for regular incineration, that allows for trailer transportation if required. Its large main chamber is easily accessed through its top-loading counterbalance lid, enabling users to load up to 240kg of waste.

As with all models in the Volkan Range, the Volkan 400 1100.2 is supplied with an integral secondary chamber, ensuring it fully conforms to EU By-Products Regulation (ABPR) (EC) No 142/2011, DEFRA Regulations and many other legislative bodies around the world. **Subject to your local regulations.

Key Features:


- Monolithic Lining - Will be graded according to your waste type
- Top loading counterbalance lid, providing easy access to the main chamber
- Low thermal mass linings for minimal heat loss
- PLC timer controls with automatic burner shut off function and rapid ignition pulse fired burners for low running costs
- Burns up to 50kgs/111 lbs an hour
- Can be loaded whilst in operation, maximising throughput whilst utilising the inherent thermal efficiency of our monolithic lining
- The 1100.2 model has a secondary chamber retention time of 1100° C at 0.2 seconds, fully conforming to world recognised regulations

Ideally Suited For:

- Poultry
- Sheep – Lambs or Ewes
- Small Pig Operations / Finishing Farms
- Game Farms
- Estates
- Farm shops
- Butchers
- Medical Waste

Optional Features:

- Mobile Option Available
- Metal Hearth
- Ash Door
- USB Data Logger
- Ash Rake
- Stack Extension
- Heat Exchanger

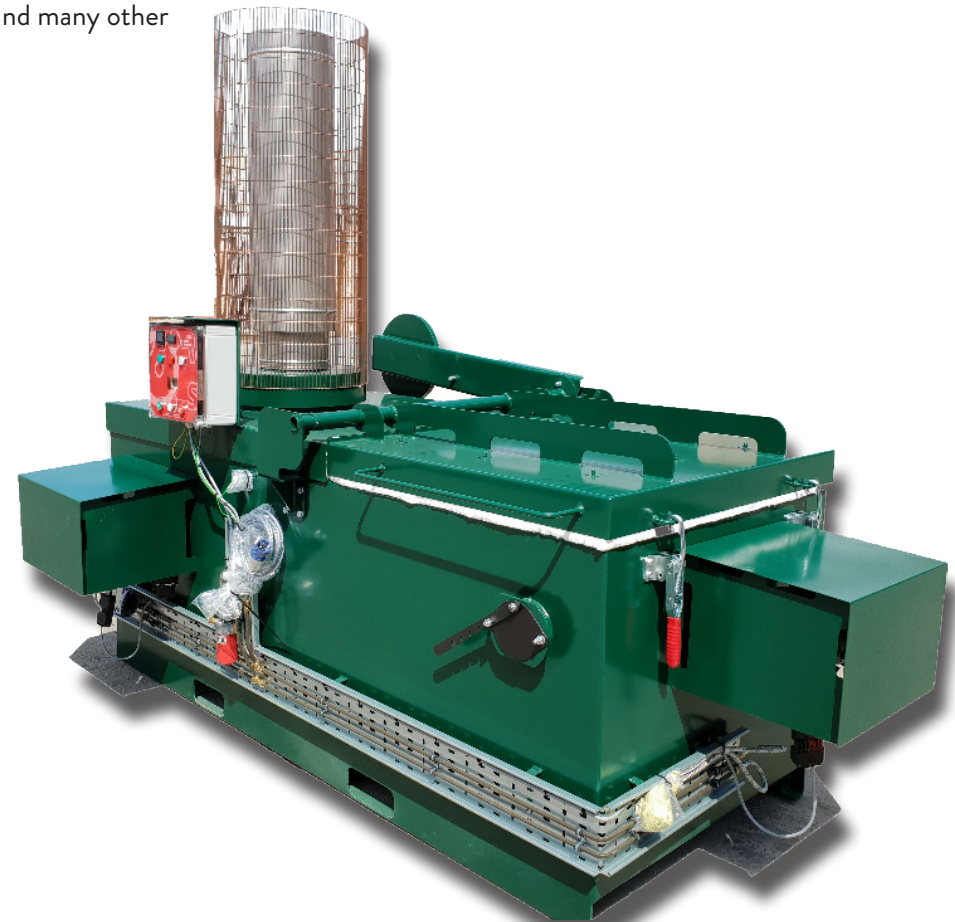

The Volkan 400 1100.2 Specifications



Specifications	Unit - Metric		Unit - Imperial	
Burn Rate	Up to kg/hr	50	Up to lbs/hr	111
Front / Top Load		Top		Top
Static Operational Dimensions (LxWxH)	m *inc Standard Stack	2.8 x 1.6 x 4.2	feet/inch *inc Standard Stack	9'3" x 5'1" x 13'9"
External Height - Static	mm *inc. Stack	4193	feet/inch *inc. Stack	13'9"
Weight	Tonne *estimated	2.2	lbs *estimated	4851
Concrete Pad Size (L x W)	m *recommended	NA	feet/inch *recommended	NA
Fuel Consumption Diesel	LPH *est during main burn	6 - 9	GPH *est during main burn	1.6 - 2.3
Fuel Consumption LPG	LPH *est during main burn	8 - 13	GPH *est during main burn	1.5 - 3.5
Fuel Consumption Nat Gas	m ³ /h *est during main burn	6 - 9	ft ³ /h *est during main burn	220 - 311
Metal Hearth		Optional		Optional
Load Door Opening (Width x Height/Depth)	mm *area	788 x 707	ft/inch *area	2'7" x 2'4"
Chamber Size (LxWxH)	m	1.4 x 0.8 x 0.7	ft/inch	4'7" x 2'6" x 2'3"
Chamber Actual Volume	m ³	0.71	ft ³	25
Chamber Load Volume	m ³	0.42	ft ³	15
Chamber Load Capacity	kg	240	lbs	529
Std Stack Diameter	inch/mm *2D size	10"	inch *2D size	10"
No. Main Burners		1		1
No. Secondary Burners		1		1
Burner Output	kW *heat	147	Btu *heat	501,585
Electric Consumption	kW *electric	0.25	kW *electric	0.25

The Waste Spectrum Way:

Here at Waste Spectrum, we do things a little differently.

- Each machine is hand crafted by our team of industry experts at our workshop in the Heart of England.
- Integral to our machines quality is the monolithic casting system, a technology that is unique to the Waste Spectrum brand. The monolithic casting system ensures maximum strength and reliability as the materials can expand and contract at the same rate, unlike brick lined machines. The insulation board reduces heat loss and the stainless anchor system maintains the integrity of the lining.
- The Waste Spectrum monolithic casting system ensures the longevity and reliability of our machines, as they can achieve high temperatures without posing risk to the machines structural integrity.
- Behind the Waste Spectrum brand is a team of experts who are always on hand to discuss any queries or questions that you may have about incineration.



Internal Chamber View



Optional: Ash Door View